

Analogue EN LHD Replacement Part - EOL module

Alarmline II Series



Overview

The AAECU-EOL is a replacement End-Of-Line unit for use with the AlarmLine II Analogue EN Liner Heat Detection (LHD) cable control unit. The AAECU control unit is supplied with an AAECU-EOL included, but in case the unit is lost or damaged then the AAECU-EOL can be supplied separately.

Standard Features

- VdS EN54-22:2015/prA1:2007. EN54-22 is referenced standard in AS 1670.1

Australia & New Zealand

Phone: 1800 654 435

Email: cs@firesecurityproducts.zendesk.com

Web: www.kidde.com.au

Head Office

Building F, Unit 1, 3-29 Birnie Avenue

Lidcombe NSW 2141

Australia

©2025 Kidde. All rights reserved.

Specifications

Mechanical

Physical dimensions	100 x 35 x 60 mm (4" x 1 3/8" x 2 3/8") (W x H x D)
Net weight	115 g
Material (body)	Aluminium

Environmental

Operating temperature	-40 to +125°C
Relative humidity	0 to 99% ambient temperature -40 to +40°C / 0 to 75% ambient temperature greater than +40°C
IP rating	IP65

Standards & regulation

Certification	CE, EN54-22, VdS
---------------	------------------

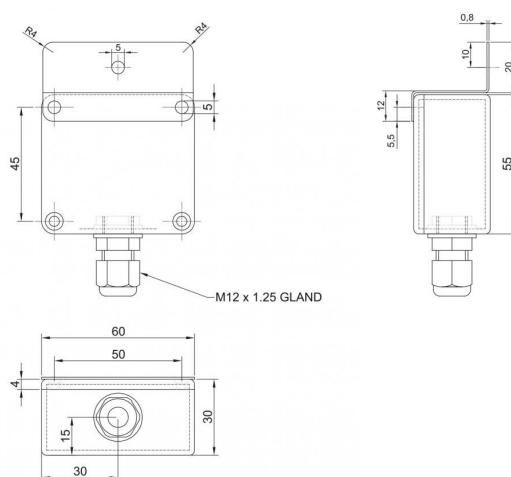


Figure 3. AlarmLine II Analogue EN EOL unit Dimensional Drawing

Ordering information

Part number	Description
AAECU-EOL	Alarmline II Analogue EN LHD Replacement Part - EOL module