

LI-ION TAMER[®] GEN 3

LITHIUM ION BATTERY OFF-GAS DETECTION SYSTEM



As the world's leading provider of advanced safety systems, Xtralis has introduced the *Li-ion Tamer GEN 3* off-gas detection system for the protection of lithium-ion batteries (LIB).

Li-ion Tamer GEN 3 reliably detects the early signs of failing LIBs (battery electrolyte vapours – off gas detection) allowing facility managers to respond to impending Thermal Runaway events much earlier than other protection systems. The system also provides multi-point temperature and humidity measurements for improved environmental control and situational awareness across a wide range of applications.

The *Li-ion Tamer GEN 3* system is highly scalable allowing cost effective deployment in modular, containerised, and large scale LIB installations. Simplified installation, featuring daisy-chain connections between sensing nodes, reduces cabling material and setup time.

System configuration and commissioning are quickly and easily done through a software interface, which provides diagnostic information for ease of troubleshooting and maintenance. Improved networking enables users to customize their detection solution by grouping sensing nodes into zones which is especially useful for complex and large installations. The system provides extended connectivity options for integration into the Battery Management System (BMS) via relays and Modbus TCP/IP.

The *Li-ion Tamer GEN 3* consists of the following major components:

(i) Sensing nodes, **(ii)** Hub, **(iii)** Power switch, **(iv)** Network switch, **(v)** Controller.

- Each sensing node comprises an off-gas sensor with advanced algorithms making it acutely sensitive to detecting battery electrolyte vapours (off-gassing compounds), does not require calibration, is compatible with all LIB form factors and chemistries, and has a lifetime comparable to a typical LIB system. The sensing node also includes temperature and humidity sensors for environmental monitoring.
- Sensing nodes are networked by the hubs and switches to the controller, which is the central point for managing and monitoring the entire system. The controller has relays and Modbus TCP/IP outputs that connect to the BMS or other control systems.



CUSTOMER BENEFITS

Earliest Warning

Utilizes an advanced algorithm to provide the earliest detection of lithium-ion battery off-gassing, creating a barrier for the prevention of catastrophic thermal runaway events.

Increased System Visibility

Allows quick and easy configuration and monitoring via user interface software that reduces commissioning and setup costs.

Lower Maintenance Cost

Provides calibration-free detection with an extended product lifetime to reduce overall cost of ownership and maintenance.

Enhanced Environmental Monitoring

Introduces granular environmental monitoring of the space with temperature and humidity detection at each detection node.


Improved Event Data Logging

Enhances storage capabilities of the controller to gather extensive event logging for more insight during post-event evaluation.

EASY SETUP AND MAINTENANCE

Setup and commissioning of the Li-ion Tamer GEN 3 system is done by connecting to the controller via the TCP/IP port.

The Software Interface simplifies system installation, commissioning, and maintenance activities. Enhanced system visibility and error tracking saves time and money by clearly and automatically identifying sensor alarm and fault conditions.

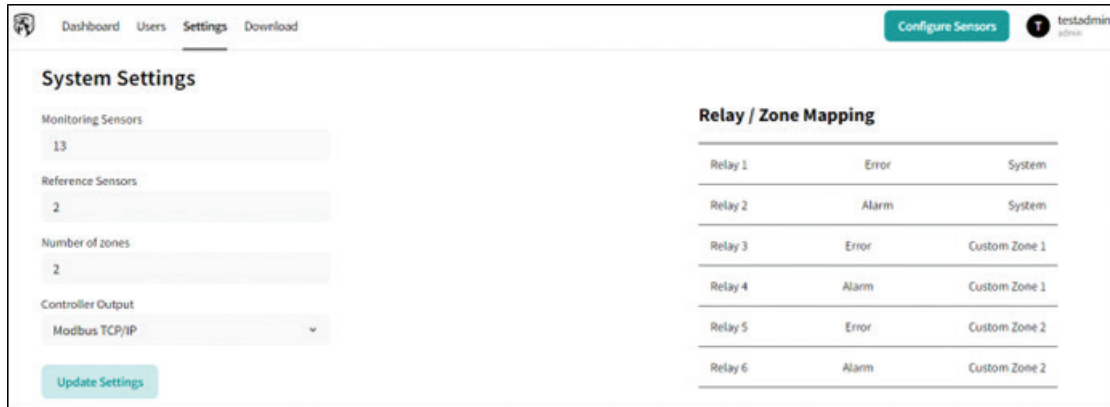

The screenshot displays the 'Settings' page of the xtralis software. The left sidebar contains navigation links: Dashboard, Users, Settings (active), and Download. The main content area is divided into two sections. The 'System Settings' section on the left includes input fields for 'Monitoring Sensors' (value: 13), 'Reference Sensors' (value: 2), and 'Number of zones' (value: 2). Below these is a 'Controller Output' dropdown menu set to 'Modbus TCP/IP'. An 'Update Settings' button is at the bottom of this section. The 'Relay / Zone Mapping' section on the right features a table with 6 rows, each representing a relay and its associated alarm type and zone.

Relay	Alarm Type	Zone
Relay 1	Error	System
Relay 2	Alarm	System
Relay 3	Error	Custom Zone 1
Relay 4	Alarm	Custom Zone 1
Relay 5	Error	Custom Zone 2
Relay 6	Alarm	Custom Zone 2

KEY APPLICATIONS

Industry Type	Key Applications
Stationary Battery Energy Storage	Containerized / modular systems Built environment systems
Data Centers	Battery UPS
Manufacturing	Assembly lines Battery formation process Cell aging and EOL testing Module or pack assembly
Automotive	Car parks / garages Charging bays Vehicle test facilities
Laboratory Safety	Environmental chambers Battery abuse testing
Shipping and Storage	Post-manufacturing storage Battery-powered equipment

SPECIFICATIONS

Controller Specifications	
Dimensions (LxWxH)	115mm x 82mm x 34mm
Input Power Range	12 VDC
Max Sensors Per Controller	100
Power Consumption Specifications	
Controller	36 W (@ 12 VDC)
Hub (Fully Populated)	6.0 W (@ 12 VDC)
Additional Hardware	See User Manual (Doc. 37141) for details.
MODBUS Output Specifications	
Hardware	TCP/IP Ethernet
Relay Output Specifications	
Connector Type	Screw Terminals
Signal Type	16 SPDT Form C Relays See User Manual (Doc. 37141) for details.
Product Life Specifications	
Target lifetime	> 10 years

Gas Detection Specifications	
Target Gases	Lithium-ion battery electrolyte solvent vapours
Min. Detection Threshold	< 1ppm/sec
Response Time	5 seconds
Fault Detection	Single cell failure
Temperature Measurement Specifications	
Measurement Range	-40 to 125°C (-40 to 257°F)
Measurement Accuracy	± 0.4°C from 5 to 60°C (41 to 140°F)
Humidity Measurement Specifications	
Measurement Range	0 to 100% RH (non-condensing)
Measurement Accuracy	± 2.0% RH from 20 to 80% RH
Environmental Specifications	
Operating Temperature	Controllers: 0 to 40°C (32 to 104°F) Sensors and Hubs: -10 to 50°C (14 to 122°F)
Humidity	10 to 90% RH (non-condensing)

ABOUT XTRALIS



Xtralis is a leading global provider of powerful solutions for very early & reliable detection of smoke, fire, and gas threats. Our technologies prevent disasters by giving users time to respond before life, critical infrastructure or business continuity is compromised.

We protect highly valuable and irreplaceable assets and infrastructure belonging to the world's top governments and businesses.

To learn more, please visit us at www.xtralis.com

KIDDE
COMMERCIAL

Building F, Unit 1
3-29 Birnie Avenue
Lidcombe, NSW, 2141

Distributed by Kidde Australia

Phone: 1800 654 435
Web: www.kidde.com.au